

# FGD3245G2-F085V

## EcoSPARK<sup>®</sup> 2 Ignition IGBT

320 mJ, 450 V, N-Channel Ignition IGBT

### Features

- SCIS Energy = 320 mJ at  $T_J = 25^\circ\text{C}$
- Logic Level Gate Drive
- Low Saturation Voltage
- AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant

### Applications

- Automotive Ignition Coil Driver Circuits
- High Current Ignition System
- Coil on Plug Application

### MAXIMUM RATINGS ( $T_J = 25^\circ\text{C}$ unless otherwise stated)

| Symbol         | Parameter                                                                            | Value           | Unit                |
|----------------|--------------------------------------------------------------------------------------|-----------------|---------------------|
| $BV_{CER}$     | Collector to Emitter Breakdown Voltage ( $I_C = 1\text{ mA}$ )                       | 450             | V                   |
| $BV_{ECS}$     | Emitter to Collector Voltage – Reverse Battery Condition ( $I_C = 10\text{ mA}$ )    | 28              | V                   |
| $E_{SCIS25}$   | ISCIS = 14.6 A, L = 3.0 mHy, RGE = 1 K $\Omega$ , $T_C = 25^\circ\text{C}$ (Note 1)  | 320             | mJ                  |
| $E_{SCIS150}$  | ISCIS = 10.9 A, L = 3.0 mHy, RGE = 1 K $\Omega$ , $T_C = 150^\circ\text{C}$ (Note 2) | 180             | mJ                  |
| $I_{C25}$      | Collector Current Continuous at $V_{GE} = 4.0\text{ V}$ , $T_C = 25^\circ\text{C}$   | 23              | A                   |
| $I_{C110}$     | Collector Current Continuous at $V_{GE} = 4.0\text{ V}$ , $T_C = 110^\circ\text{C}$  | 23              | A                   |
| $V_{GEM}$      | Gate to Emitter Voltage Continuous                                                   | $\pm 10$        | V                   |
| PD             | Power Dissipation Total, $T_C = 25^\circ\text{C}$                                    | 150             | W                   |
|                | Power Dissipation Derating, $T_C > 25^\circ\text{C}$                                 | 1.1             | W/ $^\circ\text{C}$ |
| $T_J, T_{STG}$ | Operating Junction and Storage Temperature                                           | $-55$ to $+175$ | $^\circ\text{C}$    |
| $T_L$          | Lead Temperature for Soldering Purposes ( $1/8"$ from case for 10 s)                 | 300             | $^\circ\text{C}$    |
| $T_{PKG}$      | Reflow Soldering according to JESD020C                                               | 260             | $^\circ\text{C}$    |
| ESD            | HBM–Electrostatic Discharge Voltage at 100 pF, 1500 $\Omega$                         | 4               | kV                  |
|                | CDM–Electrostatic Discharge Voltage at 1 $\Omega$                                    | 2               | kV                  |



Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Self clamped inductive Switching Energy ( $E_{SCIS25}$ ) of 320 mJ is based on the test conditions that is starting  $T_J = 25^\circ\text{C}$ , L = 3 mHy, ISCIS = 14.6 A, VCC = 100 V during inductor charging and VCC = 0 V during time in clamp.
2. Self Clamped inductive Switching Energy ( $E_{SCIS150}$ ) of 180 mJ is based on the test conditions that is starting  $T_J = 150^\circ\text{C}$ , L = 3mHy, ISCIS = 10.9 A, VCC = 100 V during inductor charging and VCC = 0 V during time in clamp.




ON Semiconductor<sup>®</sup>

[www.onsemi.com](http://www.onsemi.com)

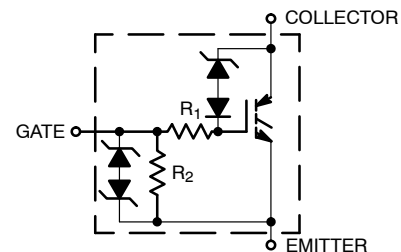

DPAK (SINGLE GAUGE)  
CASE 369C

### MARKING DIAGRAM



A = Assembly Location  
Y = Year  
WW = Work Week  
FGD3245G2 = Device Code  
G = Pb-Free Package

### ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

# FGD3245G2–F085V

## THERMAL RESISTANCE RATINGS

| Characteristic                          | Symbol          | Max | Units |
|-----------------------------------------|-----------------|-----|-------|
| Junction-to-Case – Steady State (Drain) | $R_{\theta JC}$ | 0.9 | °C/W  |

## ELECTRICAL CHARACTERISTICS ( $T_J = 25^\circ\text{C}$ unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min | Typ. | Max. | Units |
|--------|-----------|-----------------|-----|------|------|-------|
|--------|-----------|-----------------|-----|------|------|-------|

### OFF CHARACTERISTICS

|            |                                        |                                                                                                                           |                                                       |          |         |               |
|------------|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|----------|---------|---------------|
| $BV_{CER}$ | Collector to Emitter Breakdown Voltage | $I_{CE} = 2\text{ mA}$ , $V_{GE} = 0\text{ V}$ , $R_{GE} = 1\text{ k}\Omega$ ,<br>$T_J = -40\text{ to }150^\circ\text{C}$ | 420                                                   | –        | 480     | V             |
| $BV_{CES}$ | Collector to Emitter Breakdown Voltage | $I_{CE} = 10\text{ mA}$ , $V_{GE} = 0\text{ V}$ , $R_{GE} = 0$ ,<br>$T_J = -40\text{ to }150^\circ\text{C}$               | 440                                                   | –        | 500     | V             |
| $BV_{ECS}$ | Emitter to Collector Breakdown Voltage | $I_{CE} = -75\text{ mA}$ , $V_{GE} = 0\text{ V}$ , $T_J = 25^\circ\text{C}$                                               | 28                                                    | –        | –       | V             |
| $BV_{GES}$ | Gate to Emitter Breakdown Voltage      | $I_{GES} = \pm 2\text{ mA}$                                                                                               | $\pm 12$                                              | $\pm 14$ | –       | V             |
| $I_{CER}$  | Collector to Emitter Leakage Current   | $V_{CE} = 175\text{ V}$<br>$R_{GE} = 1\text{ k}\Omega$                                                                    | $T_J = 25^\circ\text{C}$<br>$T_J = 150^\circ\text{C}$ | –<br>–   | 25<br>1 | $\mu\text{A}$ |
| $I_{ECS}$  | Emitter to Collector Leakage Current   | $V_{EC} = 24\text{ V}$                                                                                                    | $T_J = 25^\circ\text{C}$<br>$T_J = 150^\circ\text{C}$ | –<br>–   | 1<br>40 | mA            |
| $R_1$      | Series Gate Resistance                 |                                                                                                                           | –                                                     | 120      | –       | $\Omega$      |
| $R_2$      | Gate to Emitter Resistance             |                                                                                                                           | 10K                                                   | –        | 30K     | $\Omega$      |

### ON CHARACTERISTICS

|               |                                         |                                                                              |   |      |      |   |
|---------------|-----------------------------------------|------------------------------------------------------------------------------|---|------|------|---|
| $V_{CE(SAT)}$ | Collector to Emitter Saturation Voltage | $I_{CE} = 6\text{ A}$ , $V_{GE} = 4\text{ V}$ , $T_J = 25^\circ\text{C}$     | – | 1.13 | 1.25 | V |
| $V_{CE(SAT)}$ | Collector to Emitter Saturation Voltage | $I_{CE} = 10\text{ A}$ , $V_{GE} = 4.5\text{ V}$ , $T_J = 150^\circ\text{C}$ | – | 1.32 | 1.50 | V |
| $V_{CE(SAT)}$ | Collector to Emitter Saturation Voltage | $I_{CE} = 15\text{ A}$ , $V_{GE} = 5\text{ V}$ , $T_J = 150^\circ\text{C}$   | – | 1.64 | 1.85 | V |

### DYNAMIC CHARACTERISTICS

|                     |                                   |                                                                       |                        |      |     |     |    |
|---------------------|-----------------------------------|-----------------------------------------------------------------------|------------------------|------|-----|-----|----|
| Q <sub>G(ON)</sub>  | Gate Charge                       | I <sub>CE</sub> = 10 A, V <sub>CE</sub> = 12 V, V <sub>GE</sub> = 5 V |                        | –    | 23  | –   | nC |
| V <sub>GE(TH)</sub> | Gate to Emitter Threshold Voltage | I <sub>CE</sub> = 1 mA<br>V <sub>CE</sub> = V <sub>GE</sub>           | T <sub>J</sub> = 25°C  | 1.3  | 1.6 | 2.2 | V  |
|                     |                                   |                                                                       | T <sub>J</sub> = 150°C | 0.75 | 1.1 | 1.8 |    |
| V <sub>GEP</sub>    | Gate to Emitter Plateau Voltage   | V <sub>CE</sub> = 12 V, I <sub>CE</sub> = 10 A                        |                        | –    | 2.7 | –   | V  |

### SWITCHING CHARACTERISTICS

|               |                                       |                                                                                                                                                            |   |     |    |               |
|---------------|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|---|-----|----|---------------|
| $t_{d(ON)R}$  | Current Turn-On Delay Time–Resistive  | $V_{CE} = 14\text{ V}$ , $R_L = 1\text{ }\Omega$ ,<br>$V_{GE} = 5\text{ V}$ , $R_G = 470\text{ }\Omega$ , $T_J = 25^\circ\text{C}$                         | – | 0.9 | 4  | $\mu\text{s}$ |
| $t_{rR}$      | Current Rise Time–Resistive           |                                                                                                                                                            | – | 2.6 | 7  |               |
| $t_{d(OFF)L}$ | Current Turn-Off Delay Time–Inductive | $V_{CE} = 300\text{ V}$ , $L = 1\text{ mH}$ ,<br>$V_{GE} = 5\text{ V}$ , $R_G = 470\text{ }\Omega$ ,<br>$I_{CE} = 6.5\text{ A}$ , $T_J = 25^\circ\text{C}$ | – | 5.4 | 15 |               |
| $t_{fL}$      | Current Fall Time–Inductive           |                                                                                                                                                            | – | 2.7 | 15 |               |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

## PACKAGE MARKING AND ORDERING INFORMATION

| Device Marking | Device          | Package        | Reel Diameter | Tape Width | Qty <sup>†</sup> |
|----------------|-----------------|----------------|---------------|------------|------------------|
| FGD3245G2      | FGD3245G2–F085V | DPAK (Pb–Free) | 330 mm        | 16 mm      | 2500             |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

TYPICAL CHARACTERISTICS

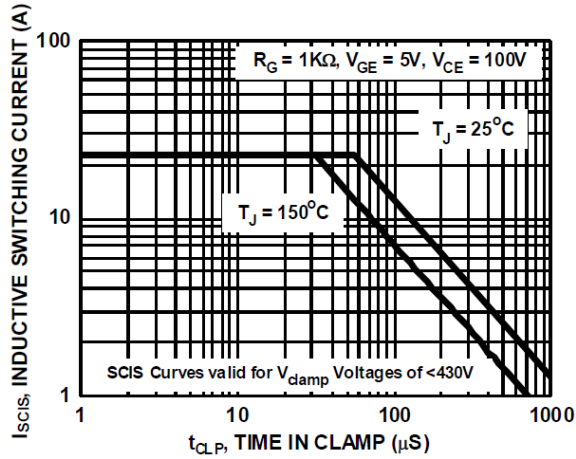


Figure 1. Self Clamped Inductive Switching Current vs. Time in Clamp

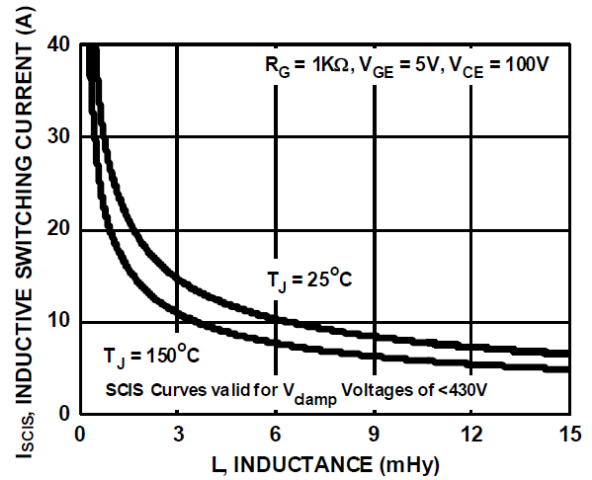


Figure 2. Self Clamped Inductive Switching Current vs. Inductance

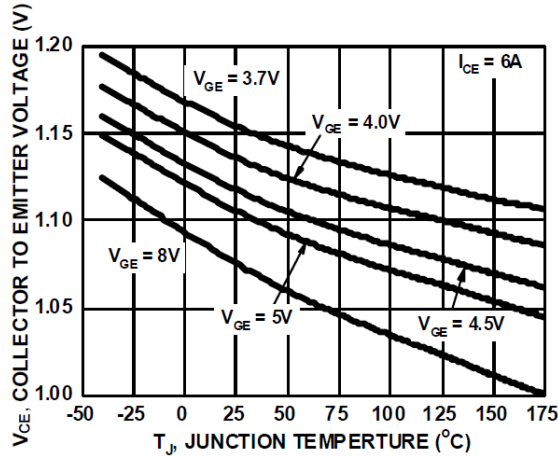


Figure 3. Collector to Emitter On-State Voltage vs. Junction Temperature

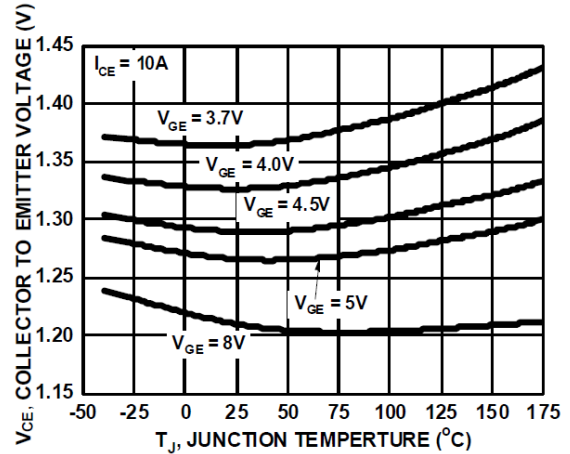


Figure 4. Collector to Emitter On-State Voltage vs. Junction Temperature

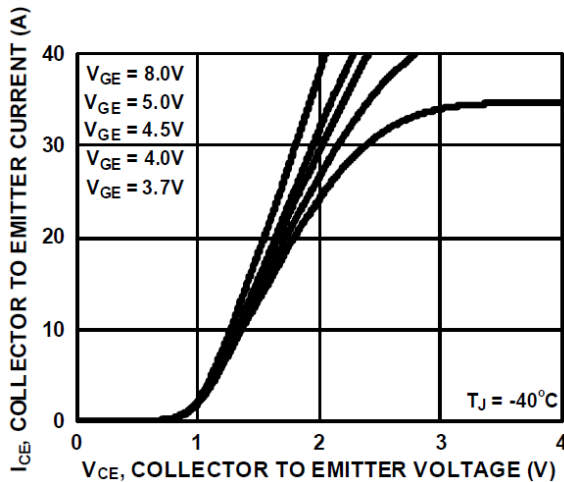


Figure 5. Collector to Emitter On-State Voltage vs. Collector Current

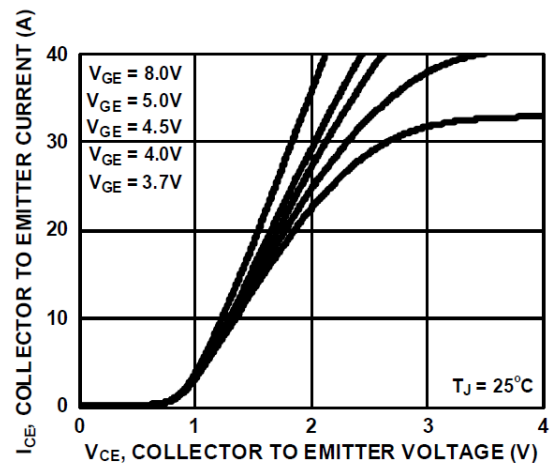


Figure 6. Collector to Emitter On-State Voltage vs. Collector Current

TYPICAL CHARACTERISTICS (continued)

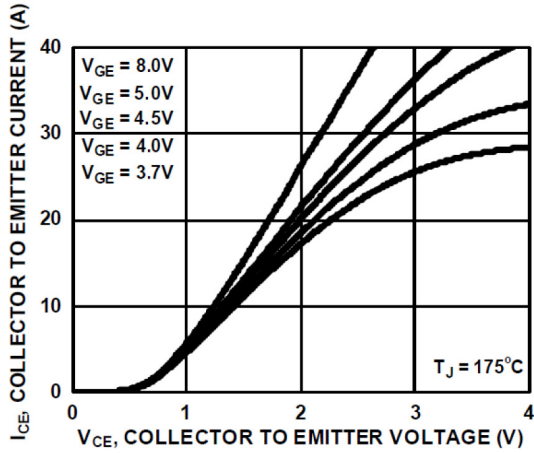


Figure 7. Collector to Emitter On-State Voltage vs. Collector Current

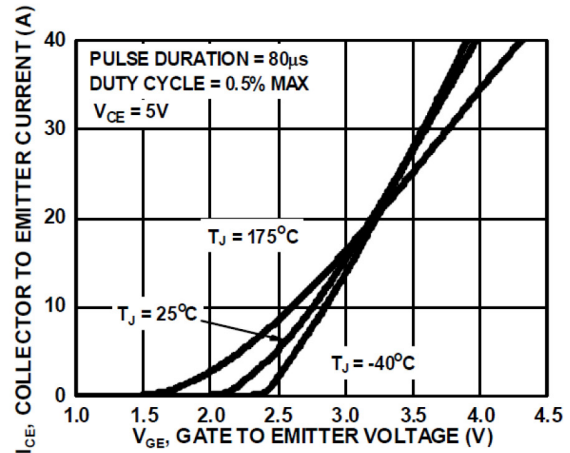


Figure 8. Transfer Characteristics

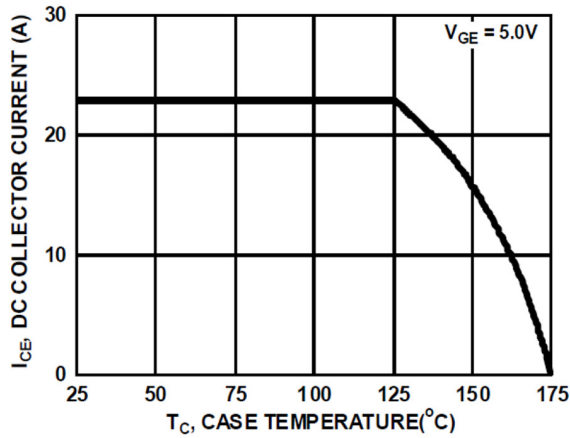


Figure 9. DC Collector Current vs. Case Temperature

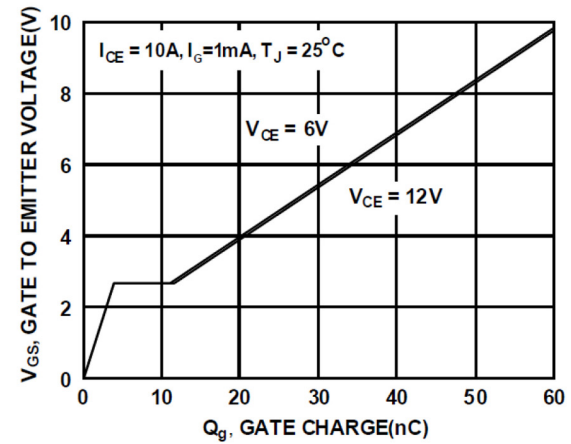


Figure 10. Gate Charge

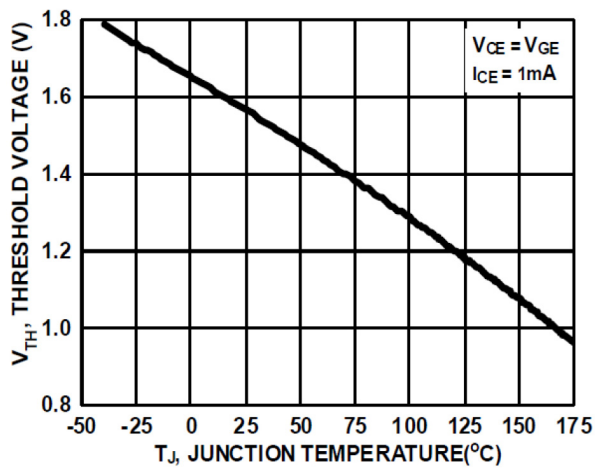


Figure 11. Threshold Voltage vs. Junction Temperature

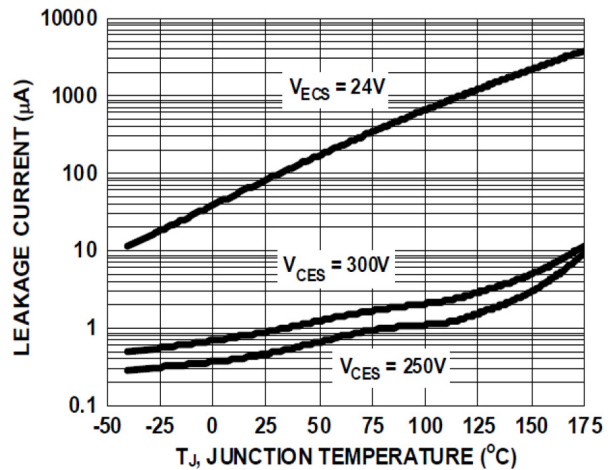


Figure 12. Leakage Current vs. Junction Temperature

TYPICAL CHARACTERISTICS (continued)

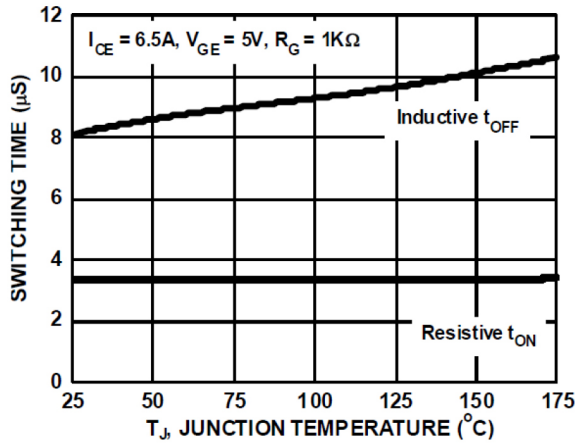


Figure 13. Switching Time vs. Junction Temperature

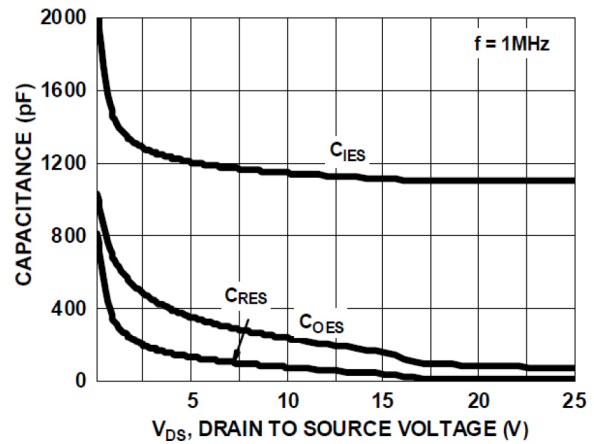


Figure 14. Capacitance vs. Collector to Emitter

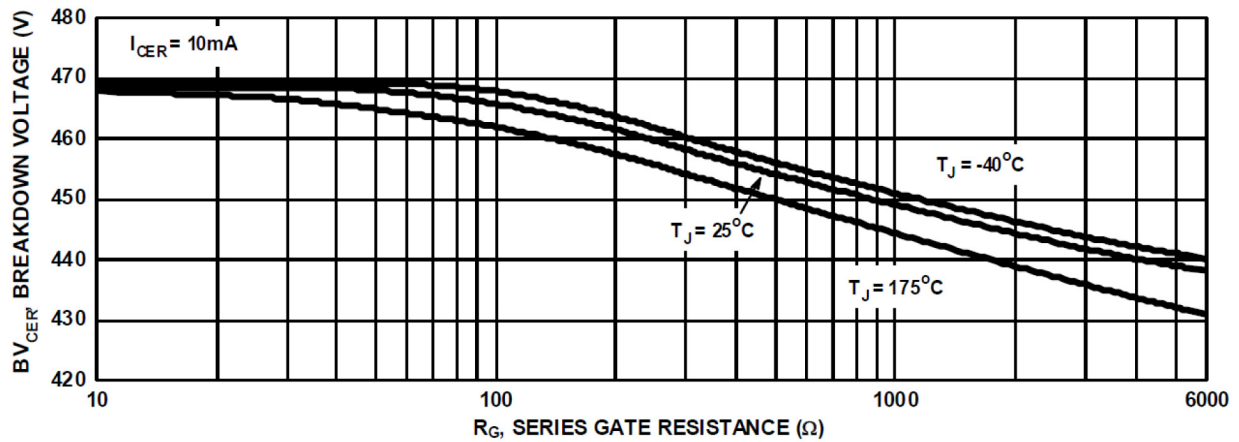


Figure 15. Break Down Voltage vs. Series Resistance

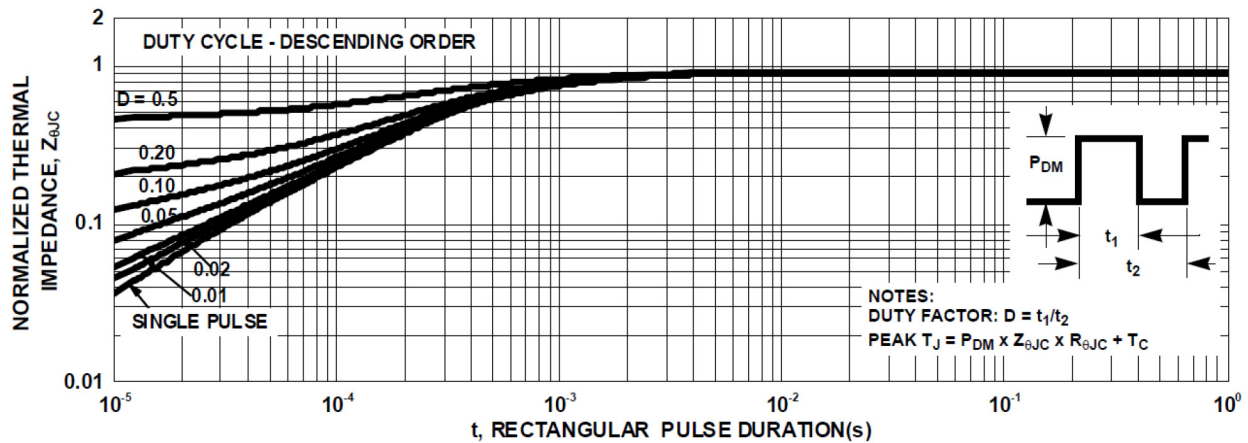


Figure 16. IGBT Normalized Transient Thermal Impedance, Junction to Case

TEST CIRCUIT AND WAVEFORMS

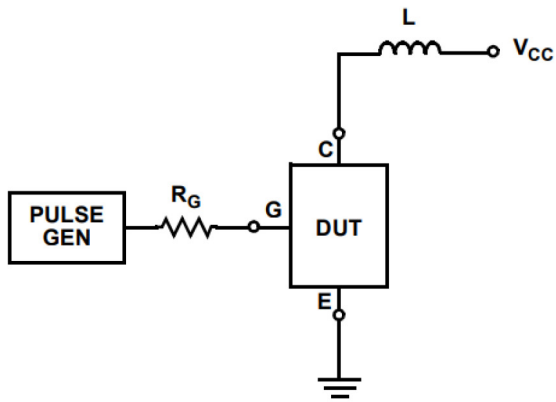


Figure 17. Inductive Switching Test Circuit

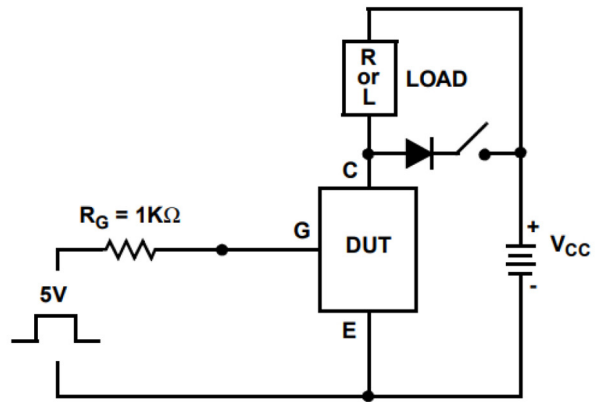


Figure 18.  $t_{ON}$  and  $t_{OFF}$  Switching Test Circuit

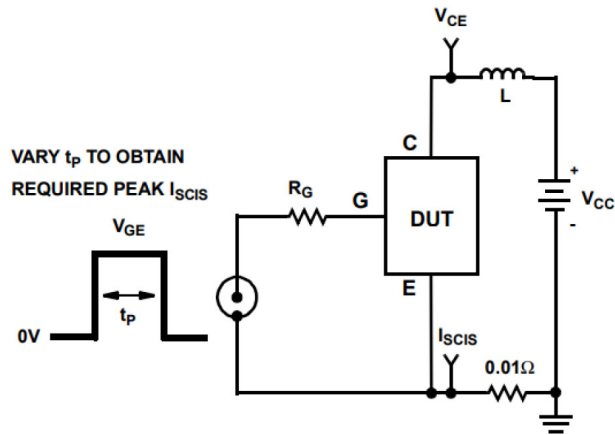


Figure 19. Energy Test Circuit


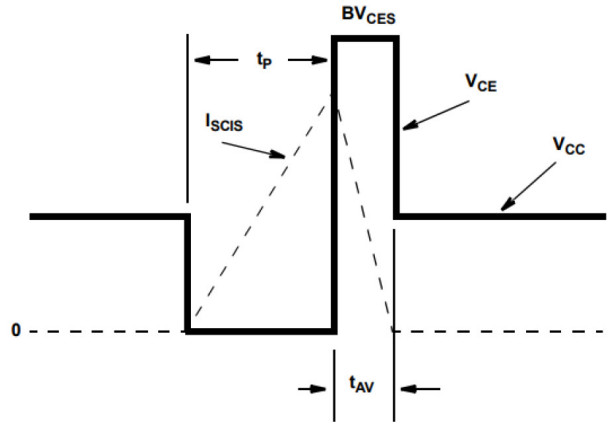


Figure 20. Energy Waveforms



# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS



SCALE 1:1

## DPAK (SINGLE GAUGE) CASE 369C ISSUE F

DATE 21 JUL 2015

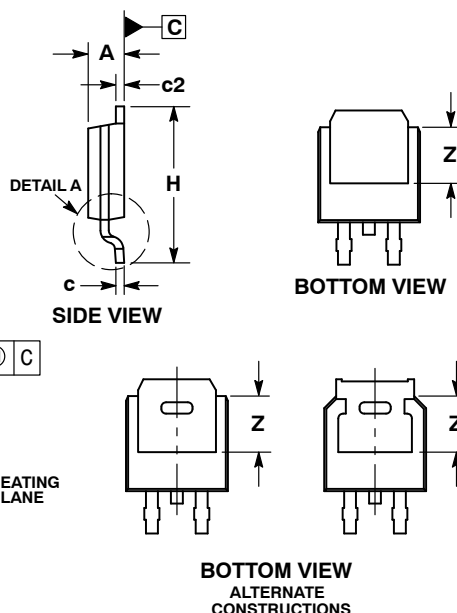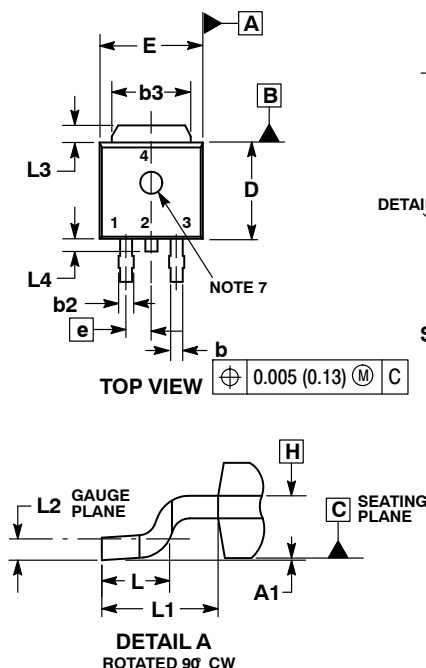


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: INCHES.
3. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS b3, L3 and Z.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.006 INCHES PER SIDE.
5. DIMENSIONS D AND E ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
6. DATUMS A AND B ARE DETERMINED AT DATUM PLANE H.
7. OPTIONAL MOLD FEATURE.

| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | 0.086  | 0.094 | 2.18        | 2.38  |
| A1  | 0.000  | 0.005 | 0.00        | 0.13  |
| b   | 0.025  | 0.035 | 0.63        | 0.89  |
| b2  | 0.028  | 0.045 | 0.72        | 1.14  |
| b3  | 0.180  | 0.215 | 4.57        | 5.46  |
| c   | 0.018  | 0.024 | 0.46        | 0.61  |
| c2  | 0.018  | 0.024 | 0.46        | 0.61  |
| D   | 0.235  | 0.245 | 5.97        | 6.22  |
| E   | 0.250  | 0.265 | 6.35        | 6.73  |
| e   | 0.090  | BSC   | 2.29        | BSC   |
| H   | 0.370  | 0.410 | 9.40        | 10.41 |
| L   | 0.055  | 0.070 | 1.40        | 1.78  |
| L1  | 0.114  | REF   | 2.90        | REF   |
| L2  | 0.020  | BSC   | 0.51        | BSC   |
| L3  | 0.035  | 0.050 | 0.89        | 1.27  |
| L4  | ---    | 0.040 | ---         | 1.01  |
| Z   | 0.155  | ---   | 3.93        | ---   |

## GENERIC MARKING DIAGRAM\*



IC


Discrete

XXXXXX = Device Code  
A = Assembly Location  
L = Wafer Lot  
Y = Year  
WW = Work Week  
G = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

- STYLE 1:  
PIN 1. BASE  
2. COLLECTOR  
3. EMITTER  
4. COLLECTOR
- STYLE 2:  
PIN 1. GATE  
2. DRAIN  
3. SOURCE  
4. DRAIN
- STYLE 3:  
PIN 1. ANODE  
2. CATHODE  
3. ANODE  
4. CATHODE
- STYLE 4:  
PIN 1. CATHODE  
2. ANODE  
3. GATE  
4. ANODE
- STYLE 5:  
PIN 1. GATE  
2. ANODE  
3. CATHODE  
4. ANODE
- STYLE 6:  
PIN 1. MT1  
2. MT2  
3. GATE  
4. MT2
- STYLE 7:  
PIN 1. GATE  
2. COLLECTOR  
3. EMITTER  
4. COLLECTOR
- STYLE 8:  
PIN 1. N/C  
2. CATHODE  
3. ANODE  
4. CATHODE
- STYLE 9:  
PIN 1. ANODE  
2. CATHODE  
3. RESISTOR ADJUST  
4. CATHODE
- STYLE 10:  
PIN 1. CATHODE  
2. ANODE  
3. CATHODE  
4. ANODE

## SOLDERING FOOTPRINT\*

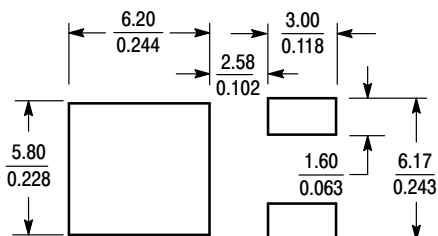

SCALE 3:1 (mm inches)

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                  |                     |                                                                                                                                                                                  |
|------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98AON10527D         | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | DPAK (SINGLE GAUGE) | PAGE 1 OF 1                                                                                                                                                                      |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**onsemi Website:** [www.onsemi.com](http://www.onsemi.com)

### TECHNICAL SUPPORT

**North American Technical Support:**

Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Phone: 011 421 33 790 2910

**Europe, Middle East and Africa Technical Support:**

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative